


CUBE TUBE	REF.	DIMENSIONS ●	FINISHES	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM* ▼	SKETCH
	9050	.01 185 x Ø86	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	567 590 592	8	350	.DA	
	9050	.02 250 x Ø86	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	567 590 592	8	350	.DA	
	9050	.03 350 x Ø86	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	567 590 592	8	350	.DA	
	9050	.04 450 x Ø86	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	567 590 592	8	350	.DA	

Reference order | REF9050.TK.XX.XX.XX.ST9.XX.XX

● Select finishes



FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

● View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

24° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White



INSTALLATIONS



.PN
PENDANT

·9050 | 9052 CUBE TUBE | PN
Pag. 350

.TK
TRACKLIGHT


·9050 CUBE TUBE | TK
Pag. 756

.SR
SURFACE

·9050 | 9052 CUBE TUBE | SR
Pag. 350



PHOTOMETRY

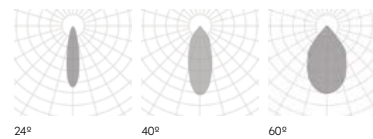

CUBE TUBE

REF 9050.TK



TRACKLIGHT

.TK